

HEINE HL 1200® Examination Light



▷ Two flexible sections

▷ Ultra-slim head

▷ 90,000 Lux at 30 cm



100 % more light with new Bulb technology. The HL 1200 is a flexible halogen examination light with a 20W IRC reflector lamp with innovative bulb technology. More than twice the brightness in comparison with conventional 20-Watt lamps for bright, white concentrated light. HL 1200 is a unique design incorporating a number of important features which most other lamps cannot match:

- ▷ **Ultra-slim head.** More freedom of movement and an unobstructed view for the examiner.
- ▷ **Built-in temperature filter.** Avoids patient discomfort.
- ▷ **Swivels through complete 180°.** Flexible and easy to position.
- ▷ **Exceeds all relevant quality standards.** Guaranteed protection for the patient even if e.g. a bulb fails.
- ▷ **“Stay-put” construction of flexible section.** Adjust the light to virtually any position and it “stays-put”, will not sag or droop.
- ▷ **Special non-tip wheeled stand.** Resists tipping to improve safety in clinic and practice.
- ▷ **Long-life 12V/20W IRC reflector lamp.** 4000 hours bulb life.
- ▷ **90,000 Lux light output at 30 cm.** Bright, white light.

HL1200 examination light, black

12V/20W

with wheeled stand (A), metal base

J-05.27.068

with lightweight wheeled stand (B), polycarbonate base

J-05.27.078

with additional multi-purpose clamp (C)

J-05.27.056

with wall-mounting bracket, can also be fitted to opt. wheeled stand (D)

J-05.27.052

HL1200 examination light, white

with wheeled stand (A), metal base

J-05.27.067

with lightweight wheeled stand (B), polycarbonate base

J-05.27.077

with additional multi-purpose clamp (C)

J-05.27.058

with wall-mounting bracket, can also be fitted to opt. wheeled stand (D)

J-05.27.054

Spare bulb 12V/20W IRC reflector

J-05.27.075

Wheeled stand (metal base) with mount for HL 1200 light

Y-96.50.004

Wheeled stand (polycarbonate base) with mount for HL 1200 light

Y-96.50.009

Mount for HL 1200 light for wheeled stand

J-00.27.069



230V is the standard mains voltage. If a different voltage is required, e.g. 120V, please specify when ordering.



HEINE HL 5000® Examination Light



- ▷ Two flexible sections
- ▷ Exceptionally-high light output
- ▷ 140,000 Lux at 30cm



With an exceptionally-high light output of 140,000 lux at a distance of 30 cm the HL 5000 examination light is ideal for examining and recognizing small details. The flexible gooseneck construction provides a working radius of 120 cm. Three versions are available: wheeled stand, wall mounting, multi-purpose clamp.

- ▷ **Long-lasting 12V/50W halogen bulb gives 140,000 Lux light output at 30 cm.** Very bright, white light.
- ▷ **Extremely compact illumination-head.** No obstruction of view, ease of handling.
- ▷ **3 different mounting options: wall, table or wheeled stand.** Versatile.
- ▷ **Halogen bulb lasts at least 4000 hours.** Economical.
- ▷ **Additional UV filter.** Increased safety during examination.
- ▷ **Solid construction with high-specification 120 cm radius gooseneck design.** Super-wide radius of operation, easy to position, light stays put in any selected position.
- ▷ **Additional IR-Filter reduces heat.** More comfort for the patient and examiner.

HL 5000 examination light

12V/50W

on non-tip wheeled stand (A), metal base

J-05.27.106

on lightweight wheeled stand L (B), polycarbonat base

J-05.27.108

with (C) wall mount

J-05.27.102

with (D) clamp mount

J-05.27.104

Spare bulb 12V/50W halogen

J-05.27.111



230V is the standard mains voltage. If a different voltage is required, e.g. 120V, please specify when ordering.

HEINE HKL® Universal Fiber Optic Examination Light




The ideal light for any doctor's practice. Provides light similar to daylight. Can be powered by any HEINE F.O. projector.

- ∴ **Adjustable Diaphragm Aperture.** Wide range of spot sizes. Bright, even light. No temperature increase.
- ∴ **Colour temperature 3800 K.** "Daylight" illumination.
- ∴ **Long, flexible arm "stays put" where required.** Very flexible to position with long-reach arm.
- ∴ **Slimline head.** Unobstructed view.
- ∴ **Universal-mounting.** Suits the practitioner's needs.
- ∴ **Can be retro-mounted to existing projectors.** Makes an examination light out of any projector.
- ∴ **30,000 Lux light output at 20 cm with projector HK 7000.**

Mounting options

on wheeled stand
with clamp for table-top mounting (maximum 40 mm thick)
with clamp for vertical mounting to a tube up to 40 mm dia.
with clamp for mounting to square tube up to 40 mm dia.
wall-mounting for HK 7000 projector.

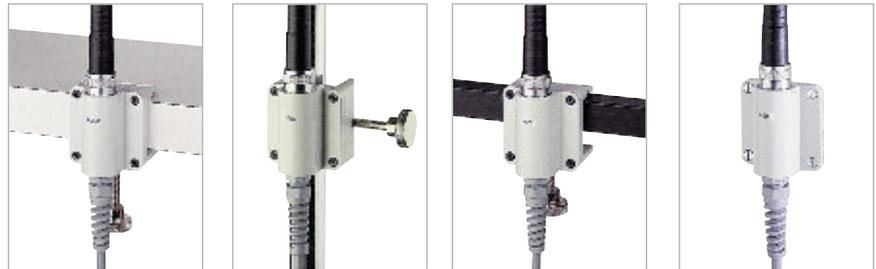

HKL Light


F.O.

with clamp	J-03.27.001
with wall-bracket	J-03.27.002
on wheeled stand	J-03.27.004

Clamp, only	J-00.27.010
Base plate, only	J-00.27.011
Wheeled stand without base-plate	Y-96.50.001
Wheeled stand with base-plate	Y-96.50.002

Please order the projector separately

Light spot sizes

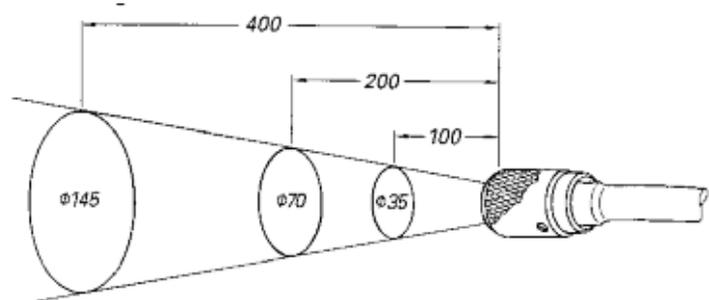

230V is the standard mains voltage. If a different voltage is required, e.g. 120V, please specify when ordering.